



SN-NVR2664E8

64CH 8HDD NVR



Key Features



- Up to 64ch IP cameras access
- Up to 12MP resolution recording
- 8 SATA hard disk each up to 12TB
- 2 RJ45 10M/100M/1000M network interface
- Support RAID 5/6/10
- Simultaneous HDMI&VGA up to 4K output
- Smart search & playback
- Support cloud upgrade

Specification

Video Input	
IP Camera Input	64 Channel
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Video Output	
HDMI Output	HDMI 1: 1920x1080,1440x900, 1280x1024 HDMI 2: 3840x2160, 1920x1080,1440x900, 1280x1024
VGA Output	1920x1080,1440x900, 1280x1024
Different Source Output	Support
Decoding Capacity	1ch 12MP, 4ch 8MP, 8ch 4MP, 16ch 1080P, 32ch 720P, 64ch D1
Dual Stream	Support
Multi-screen Display	1st Screen: 1/4/8/9/16/32/36/64 2nd Screen: 1/4/8/9/16
Recording	
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network, eSATA
Network	
Interface	2 RJ-45 port (10/100/1000Mbps)
PoE	N/A
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK

Storage	
HDD	8 SATA Ports, up to 12TB for each HDD
eSATA	1 eSATA Port
Cloud Storage	Support
Disk Array	
Array Type	RAID 5, RAID 6, RAID 10
Interface	
Audio I/O	1/1
Alarm Input	16ch
Alarm Output	4ch
USB	3 ports (USB 2.0 x 2, USB3.0 x 1)
RS485	1 Port
RS232	1 Port
General	
Power Supply	AC100 ~ 240V
Power Consumption	< 15W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	440 x 433.5 x 93mm
Net Weight	7.2kg (without HDD)

Dimensions(mm)

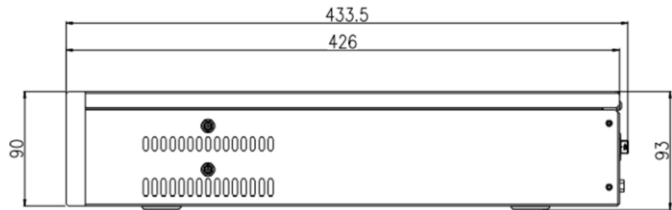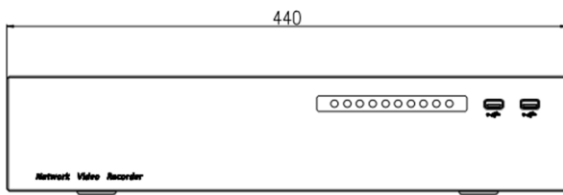

Rear Panel

